

UNICO<sup>®</sup>  
TILES

Grow Together with Clay Creations



800mm x 1600mm

GLAZED PORCELAIN TILES  
WITH DIGITAL PRINT

COLLECTION  
2020



THICKNESS

**9 MM**

SERIES

**GEM COLLECTION**

FINISH

**HIGH GLOSS**

CALACUTTA PINK

**800 X 1600 MM**









THICKNESS

**9 MM**

SERIES


**GEM COLLECTION**

FINISH

**HIGH GLOSS**

DALLAS GRAY

**800 X 1600 MM**









THICKNESS

**9 MM**

SERIES




**GEM COLLECTION**

FINISH

**HIGH GLOSS**

DYNA CLASSIC


**800 X 1600 MM**

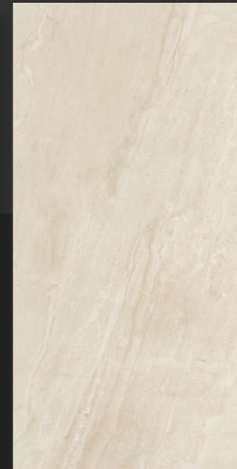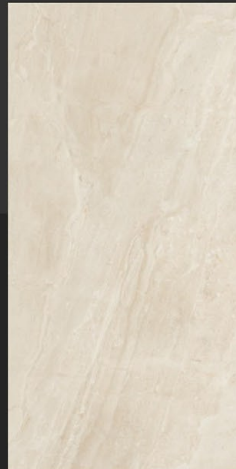







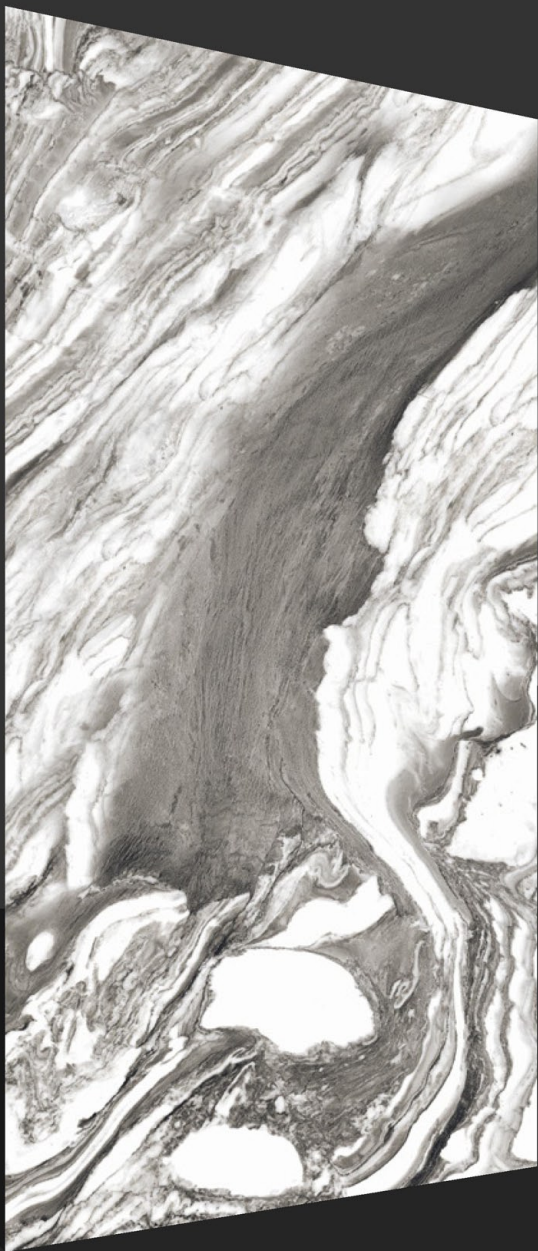

THICKNESS

**9 MM**

SERIES


**GEM COLLECTION**

FINISH

**HIGH GLOSS**

NERO VOLCANO

**800 X 1600 MM**

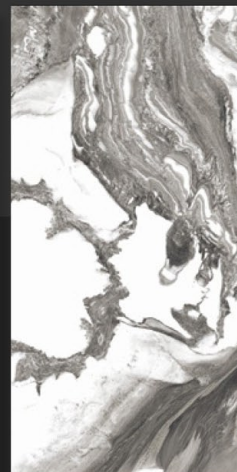







THICKNESS

**9 MM**

SERIES




**GEM COLLECTION**

FINISH

**HIGH GLOSS**

NOVA CRYSTAL

**800 X 1600 MM**

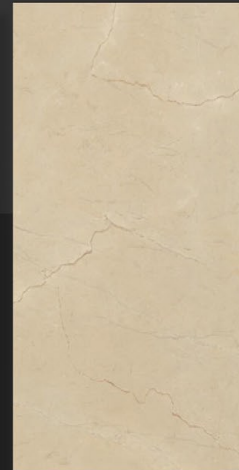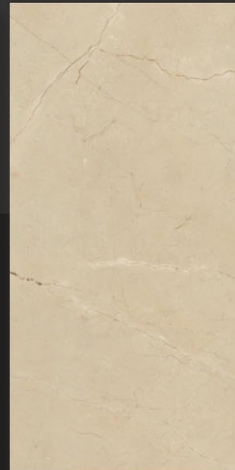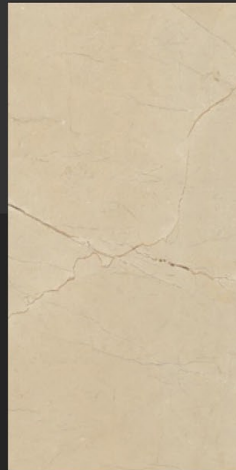







THICKNESS

**9 MM**

SERIES




**GEM COLLECTION**

FINISH

**HIGH GLOSS**

ONIX BEIGE

**800 X 1600 MM**

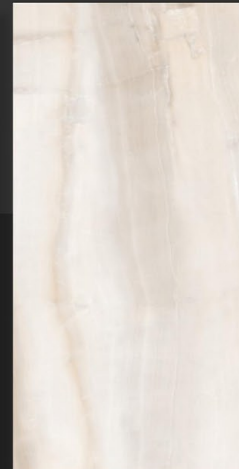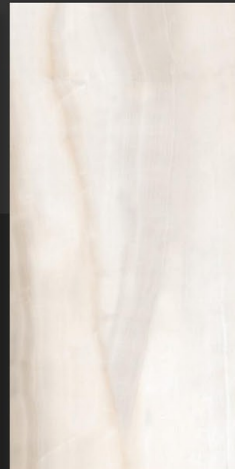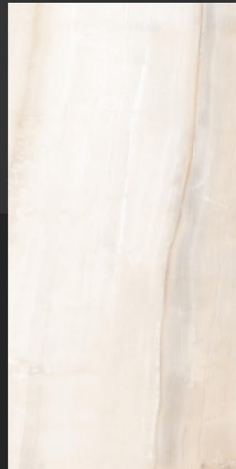







THICKNESS

**9 MM**

SERIES




**GEM COLLECTION**

FINISH

**HIGH GLOSS**

OPERA IVORY

**800 X 1600 MM**

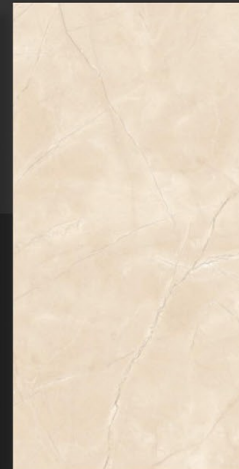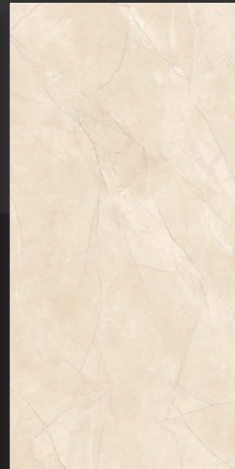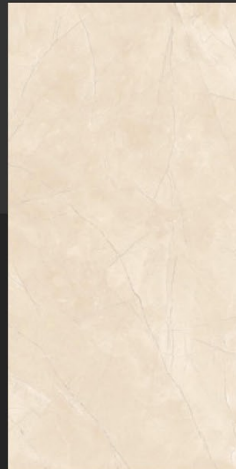



IAN L. McHARG design with nature



THICKNESS

**9 MM**

SERIES




**GEM COLLECTION**

FINISH

**HIGH GLOSS**

PIETRA SILVER

**800 X 1600 MM**

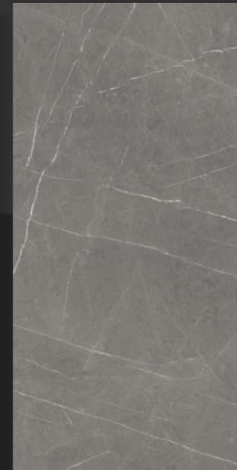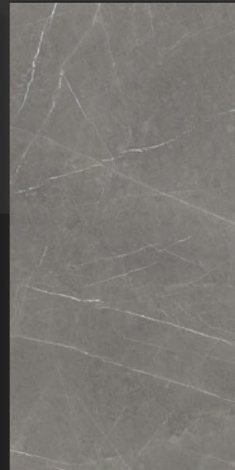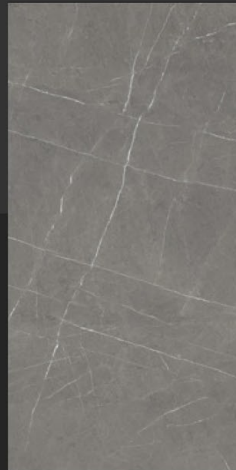







THICKNESS

**9 MM**

SERIES


**GEM COLLECTION**

FINISH

**HIGH GLOSS**


PIETRA THUNDER

**800 X 1600 MM**

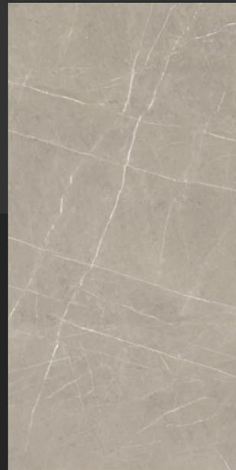





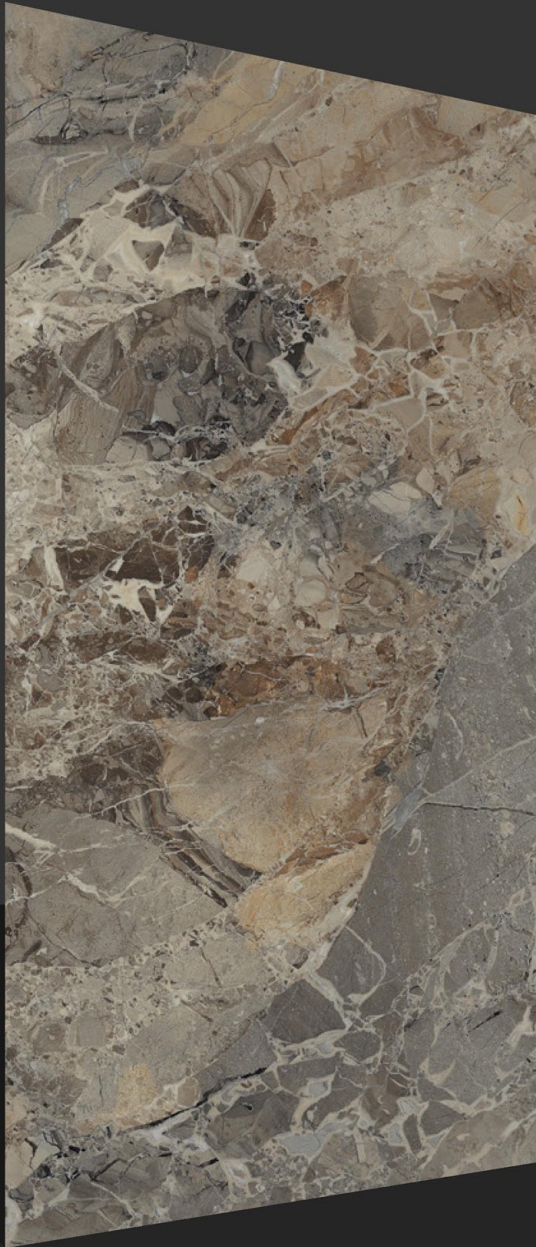

THICKNESS

**9 MM**

SERIES



**GEM COLLECTION**

FINISH

**HIGH GLOSS**

## PERSIAN GRANITE

**800 X 1600 MM**

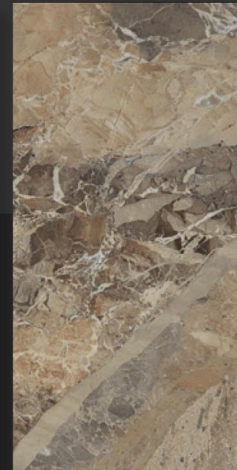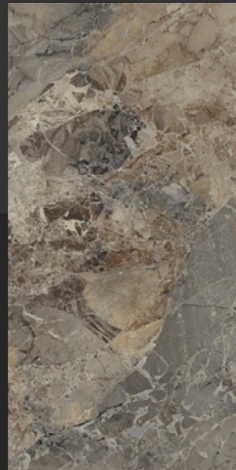









THICKNESS

**9 MM**

SERIES


**GEM COLLECTION**

FINISH

**HIGH GLOSS**

ROCK BROWN

**800 X 1600 MM**

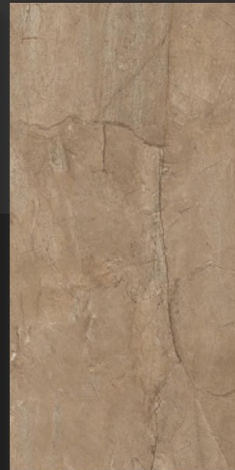





TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	VALUE
Length and width	BS EN ISO 10545-2	± 0.6%	± 0.3%
Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Breaking strength	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	≥ 45N/mm <sup>2</sup>
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm <sup>3</sup>	≤ 150mm <sup>3</sup>
Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 <sup>-6</sup> °C <sup>-1</sup>	≤ 7 x 10 <sup>-6</sup> °C <sup>-1</sup>
Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
Resistance to stain	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
Colour resistance	BS EN ISO 10545-16	No damage	No damage
Colour resistance to UV Light	DIN 51094	No change in color	No change in color
Scratch hardness(MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
Skid resistance (friction co-efficient)	BS EN ISO 10545-17	> 0.4	>0.4
Moisture Expansion	-	Nil	Nil

SIZE	80x160
THICKNESS	9mm
WEIGHT / BOX (KG)	56
PIECES (BOX)	2
BOXES IN PALLET (H) horizontal, (V)vertical	28x17 (V)
PALLET / CONTAINER	17 - 20 Feet
BOXES IN CONTAINER	476
m2 IN BOX	2.56
m2 IN 20 H'C CONTAINER	1218.56
TOTAL WEIGHT IN CONTAINER	26800

AN  
**ISO**  
CERTIFIED  
COMPANY



Corporate Office:

**UNICO TILES PVT. LTD.**

6 - Shakti Industrial Estate, Gujarat Gas Office Lane,  
Behind Shakti Chambers - 1, 8-A, National Highway,  
Morbi - 363 642 (Guj.) INDIA. Ph.: 02822 - 244141

**Cell & WhatsApp: +91 98250 35219 | +91 78 78 44 66 77**

 unicotiles

---

✉ [info@unicotiles.com](mailto:info@unicotiles.com) | [export@unicotiles.com](mailto:export@unicotiles.com)

🌐 [www.unicotiles.com](http://www.unicotiles.com) | [www.unicosanitaryware.com](http://www.unicosanitaryware.com) | [www.unicostone.in](http://www.unicostone.in)

Follow us On:    